

MAIN AND SUBCONTRACTOR

C. Sommariva

Ansaldo Energia S.p.A., Piazza Monumento 12, 20025 Legnano, Italy

Keywords : Battery limits, Routing, HVAC, HRSG, P&I

Contents

- 1. Introduction
- 2. Definition of the Interfaces
- 3. Interface with Power Plant
- Glossary
- Bibliography and Suggestions for further study

1. Introduction

A desalination project features several interfaces which yield the engineering coordination of the project and, in general, the project management, which is particularly difficult with respect to other project of equal size. In particular several process interfaces need a definition in the early design phases in order to allow other partners to proceed with the development of their own basic engineering.

2. Definition of the Interfaces

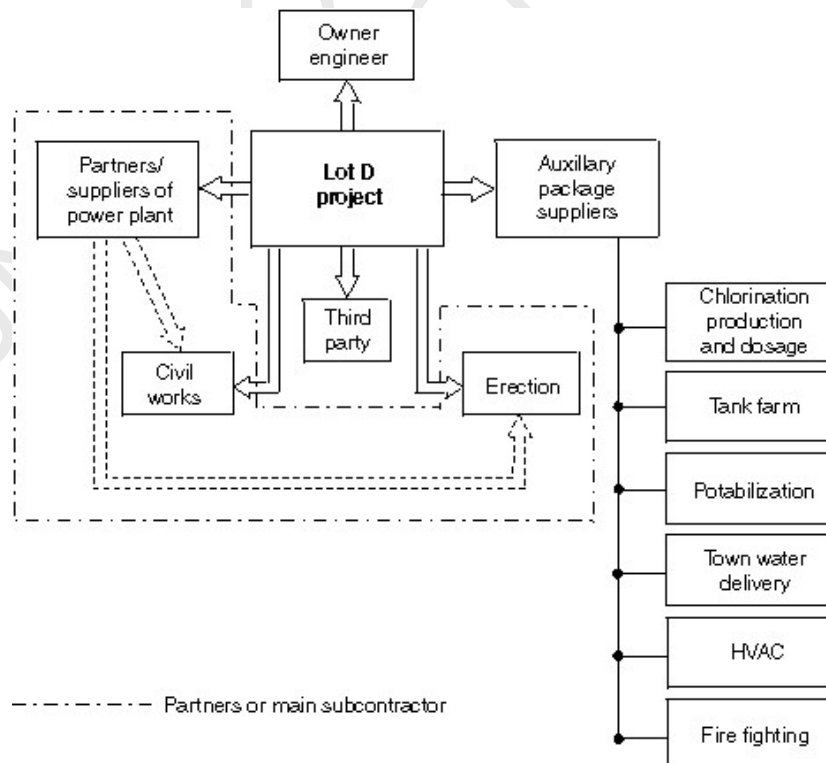


Figure 1. Desalination project interfaces.

Figure 1 shows the main interfaces that must be considered. The interfaces with the owner/engineer are the most important since the entire project's development is based on it. The project engineer and engineering team following the documentation submittals and approval of the same must ensure a basic common understanding of the construct between the contractor and the owner.

-
-
-

TO ACCESS ALL THE **5 PAGES** OF THIS CHAPTER,
Visit: <http://www.desware.net/DESWARE-SampleAllChapter.aspx>

Bibliography and Suggestions for further study

Anthony Speaight (2010), *Architect's Legal Handbook: The Law for Architects*

Cohen P (1992) *The ASME Hand Book on Water Technology for Thermal Power Systems*, pp. 115-158.

Hugh Clamp (1995), *Spon's landscape contract handbook: a guide to good practice and procedures*, Taylor & Francis .

Neil Petchers(2003), *Combined heating, cooling, and power handbook*, The Fairmont Press, Inc .

Vivian Ramsey (2007) *Construction Law Handbook*, Thomas Telford Limited